

MAYTAG

TECHNICAL SPECIFICATIONS

Model MSA4BE Series



M120 Product Line

**R-410A High Efficiency Air Conditioner
14 SEER — 1.5 - 5 Ton Capacity**

- **12 YEAR ALL PARTS WARRANTY**
- **This product offers a 1 Year Dependability Promise to replace the unit if the compressor fails in the first year of operation, to the original owner. All split system products must be installed with a matched indoor air handler or indoor coil to qualify.**
- **Product registration required for 12-year All Parts Warranty and Dependability Promise within a limited period of time after the installation. See current warranty document for details. This can be viewed at www.maytagvac.com or ask your sales representative.**

Maytag now offers the choice of an air conditioner that uses a more efficient and environmentally friendly refrigerant designated R-410A. The MSA4BE Series of air conditioners offers exceptional performance. The unit, when combined with our engineered coils or air handlers, offers a full line of quality, split system cooling equipment.

Features and Benefits

- **Smart Cool 410™ Refrigerant (R-410A)** – Earth friendly non-ozone depleting refrigerant.
- **Permanently Lubricated Motor** – A heavy duty PSC motor for long lasting reliability and quiet operation. Requires no maintenance and is completely protected from rain and snow.
- **Removable Top Grille Assembly** – Allows ease of service from the top without disconnecting fan motor leads.
- **High Pressure Switch** – Protects against abnormally high system pressures. Auto-reset feature prevents nuisance service visits.
- **Liquid Line Filter / Drier** – Included with unit, field installed.
- **One Piece Top/Orifice** – Designed for maximum airflow and quiet operation.
- **Easy Compressor and Control Access** – Designed to make servicing easier for the contractor, access panels are provided to all controls and the compressor from the side of the unit.
- **Composite Base Pan** – Absorbs sound and is corrosion resistant. Composite is also stronger and lighter than steel.
- **Designed Using Galvanized Steel** – With a polyester urethane coat finish. The 950 hour salt spray finish resists corrosion 50% better than comparable units.
- **Micro-Channel Coils** – All aluminum coils in 1.5 thru 4 ton models which provides high corrosion resistance.




DIMENSIONS/OUTDOOR SECTION

14 SEER — High Efficiency

MSA4BE	018KA	024KA	030KA	036KA	042KA	048KA	060K
H	27 1/2"	31 1/2"	27 1/2"	35 1/2"	39 1/2"	39 1/2"	43"
W	22 3/4"	22 3/4"	30 3/4"	30 3/4"	30 3/4"	30 3/4"	30 3/4"
D	22 3/4"	22 3/4"	30 3/4"	30 3/4"	30 3/4"	30 3/4"	30 3/4"



IDENTIFICATION CODE

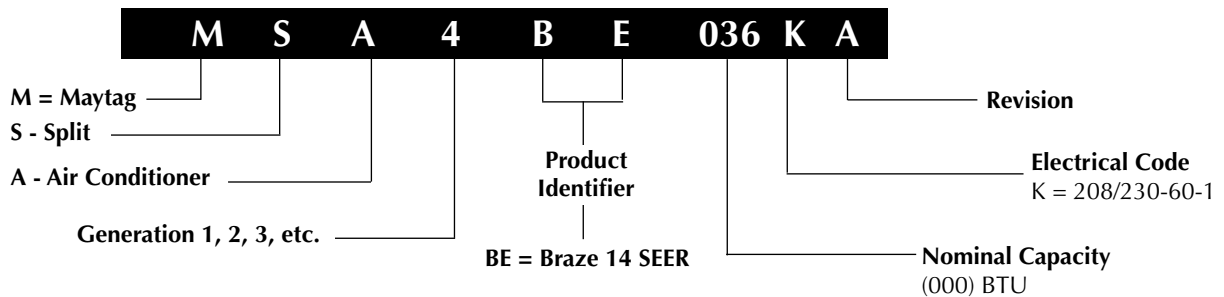

PHYSICAL AND ELECTRICAL SPECIFICATIONS/OUTDOOR UNITS

14 SEER — High Efficiency

Model Number MSA4BE		018KA	024KA	030KA	036KA	042KA	048KA	060K	
Electrical Data	Volts-Cycles-Phase (1)	208/230-60-1	208/230-60-1	208/230-60-1	208/230-60-1	208/230-60-1	208/230-60-1	208/230-60-1	
	Total Amps	9.9	14.4	15.0	15.1	19.4	21.3	27.6	
	Delay Fuse Max. (2)	20	30	30	30	40	45	60	
	Min. Circuit Ampacity	12.1	17.7	18.5	18.6	23.9	26.3	34.2	
Component Data	Coil	Area	10.0	11.7	15.2	20.3	22.8	22.8	25.4
		Rows-FPI	1-23	1-23	1-18	1-18	1-18	1-18	2-16
		Tube Dia	Micro-Channel						3/8" O.D.
	Fan Motor	Type	PSC						
		Amps	0.9	0.9	0.9	1.0	1.5	1.5	1.4
		HP	0.13	0.13	0.13	0.20	0.25	0.25	0.25
	Compressor Data	RLA	9.0	13.4	14.1	14.1	17.9	19.8	26.2
		LRA	48.0	58.3	73.0	77.0	112.0	109.0	134.0
Refrigerant suction line O.D. NOTE: Liquid line is 3/8" O.D. for entire length.	0-24 ft.	3/4"	3/4"	3/4"	3/4"	7/8"	7/8"	7/8"	
	25-39 ft.	3/4"	3/4"	3/4"	7/8" (3)	7/8"	7/8"	1-1/8" (4)	
	40-75 ft.	3/4"	3/4"	3/4"	7/8" (3)	7/8"	7/8"	1-1/8" (4)	
Approximate Weight (lbs.)	Net	124	144	179	188	198	208	223	
	Ship	130	151	187	197	207	217	235	
Sound Ratings (dB)	74	74	75	79	79	79	79	79	

(1) Operating Voltage Range: 187v min. - 253v max.

(2) HACR Type Circuit Breakers may be used.

(3) Requires 7/8" to 3/4" reducer from line to unit.

(4) Requires 7/8" to 1-1/8" reducer from line to unit.

(5) Additional charge for line sets above 15 feet.

Values based on suction line as follows with 3/8" liquid line.

a) 3/4" = 0.6 oz. per additional foot.

b) 7/8" = 0.7 oz. per additional foot.

c) 1 1/8" = 0.8 oz. per additional foot.

ACCESSORIES - CONDENSING UNIT

Start Assist Kit - 912933

Provides additional starting torque for the compressor motor when operating with low line voltage or high operating temperatures.

Fan Delay Kit (TDR)

911758 - 80 second fan delay

Extreme Wind Condition Mounting Kit - 920900

SYSTEM HEATING & COOLING CAPACITIES

14 SEER — High Efficiency — Single Phase

Outdoor Unit	Indoor Unit	BTUH	SEER	EER	CFM
MSA4BE018KA	C7B(A,H)M01824(C,U)-A+TXV	18,000	14	12.2	680
MSA4BE018KA	C7B(A,H)M01824(C,U)-B+TXV	18,000	14	12.2	680
MSA4BE024KA	C7B(A,H)M01824(C,U)-A+TXV	24,000	14	12.2	845
MSA4BE024KA	C7B(A,H)M01824(C,U)-B+TXV	24,000	14	12.2	845
MSA4BE030KA	C7B(A,H)M03036(C,U)-A+TXV	29,000	14	12.0	945
MSA4BE030KA	C7B(A,H)M03036(C,U)-B+TXV	29,000	14	12.0	945
MSA4BE036KA	C7B(A,H)M03642(C,U)-B+TXV	34,800	14	12.2	1110
MSA4BE036KA	C7B(A,H)M03648(C,U)-C+TXV	34,800	14	12.2	1110
MSA4BE042KA	C7B(A,H)M03642(C,U)-B+TXV	40,500	14	12.2	1305
MSA4BE042KA	C7B(A,H)M03648(C,U)-C+TXV	40,500	14	12.2	1305
MSA4BE048KA	C7B(A,H)M048(C,U)-C+TXV	45,500	14	11.7	1525
MSA4BE048KA	C7B(A,H)M048(C,U)-D+TXV	45,500	14	11.7	1525
MSA4BE060K	C6BH-X60C-(C,D)	59,000	14	12.2	1650

Outdoor Unit	Indoor Unit	BTUH	SEER	EER	CFM
MSA4BE018KA	B6BM-X24K-A	18,000	14	12.2	600
MSA4BE018KA	B6BM-X24K-B	18,000	14	12.2	600
MSA4BE024KA	B6BM-X24K-A	24,000	14	12.2	705
MSA4BE024KA	B6BM-X24K-B	24,000	14	12.2	705
MSA4BE030KA	B6BM-X30K-A	30,200	14	12.2	875
MSA4BE030KA	B6BM-X30K-B	30,200	14	12.2	875
MSA4BE036KA	B6BM-X36K-B	34,000	14	12.2	905
MSA4BE042KA	B6BM-X42K-B	40,000	14	12.2	1225
MSA4BE048KA	B6BM-X48K-C	45,500	14	11.7	1450
MSA4BE060K	B6BM-X60K-C	59,000	14	11.7	1700

See current AHRI Directory for certified combinations and ratings. All ratings are with time delay relay.

www.ahridirectory.org

14 SEER + LOOSE COIL COOLING EXPANDED RATINGS

MSA4BE018KA C7B(A,H)M01824(C,U)-A + TXV Kit

CFM	O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	
525	80	62	19.7	14.7	1.08	19.0	14.6	1.22	18.2	15.0	1.36	17.3	14.8	1.51	16.36	15.63	1.69	15.31	14.63	1.89	
	80	67	21.7	12.2	1.08	20.8	12.1	1.22	19.9	12.2	1.36	18.9	12.0	1.52	17.80	11.75	1.71	16.69	10.92	1.90	
	80	72	23.9	9.6	1.08	22.9	9.5	1.22	21.9	9.7	1.38	20.7	9.4	1.54	19.57	9.26	1.72	18.37	9.48	1.91	
	75	62	19.7	12.3	1.08	18.9	12.2	1.22	18.1	12.3	1.36	17.2	12.1	1.51	16.21	11.04	1.69	15.13	11.88	1.89	
600	80	62	20.3	16.2	1.11	19.5	16.6	1.25	18.7	16.2	1.39	17.8	16.0	1.54	16.75	15.99	1.72	15.88	15.75	1.92	
	80	67	22.3	13.0	1.11	21.4	13.4	1.25	20.4	13.0	1.39	19.3	12.9	1.55	18.13	12.83	1.74	16.98	12.81	1.93	
	80	72	24.5	10.0	1.11	23.5	10.5	1.25	22.3	10.1	1.41	21.1	10.0	1.57	19.94	10.08	1.75	18.68	10.13	1.94	
	75	62	20.2	13.1	1.11	19.4	13.5	1.25	18.5	13.1	1.39	17.6	12.9	1.54	16.53	12.87	1.72	15.42	12.78	1.92	
675	80	62	20.8	17.6	1.14	20.0	17.7	1.28	19.1	17.4	1.42	18.2	17.2	1.57	17.34	16.75	1.76	16.38	16.31	1.95	
	80	67	22.7	14.0	1.13	21.7	14.1	1.27	20.7	13.8	1.42	19.6	13.7	1.59	18.40	13.56	1.77	17.21	13.61	1.96	
	80	72	25.0	10.8	1.13	23.9	11.0	1.28	22.7	10.6	1.44	21.5	10.6	1.61	20.21	10.54	1.78	18.92	10.68	1.97	
	75	62	20.6	14.1	1.14	19.7	14.2	1.28	18.8	13.9	1.42	17.9	13.8	1.57	16.75	13.59	1.75	15.69	13.95	1.95	

MSA4BE024KA C7B(A,H)M01824(C,U)-A+TXV Kit

CFM	O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	
700	80	62	25.2	19.8	1.38	24.3	19.7	1.55	23.2	19.8	1.72	22.1	19.5	1.91	20.90	20.47	2.12	19.63	19.23	2.38	
	80	67	27.5	15.9	1.38	26.4	15.8	1.55	25.2	16.0	1.73	23.9	15.7	1.93	22.50	15.39	2.15	21.14	14.48	2.39	
	80	72	30.2	12.3	1.39	28.9	12.3	1.56	27.6	12.5	1.75	26.1	12.2	1.96	24.69	11.99	2.17	23.18	12.29	2.41	
	75	62	25.0	16.2	1.38	24.1	16.0	1.55	23.0	16.1	1.72	21.9	15.8	1.91	20.63	14.50	2.12	19.27	15.60	2.38	
800	80	62	25.9	21.4	1.42	24.8	21.8	1.59	23.8	21.3	1.76	22.6	21.1	1.95	21.54	20.82	2.18	20.40	20.23	2.42	
	80	67	28.1	17.0	1.42	26.9	17.5	1.59	25.7	17.0	1.77	24.4	16.8	1.97	22.92	16.81	2.20	21.48	16.80	2.43	
	80	72	30.8	13.0	1.43	29.5	13.6	1.60	28.1	13.1	1.80	26.6	13.0	2.00	25.07	13.06	2.22	23.50	13.14	2.45	
	75	62	25.6	17.2	1.42	24.6	17.6	1.59	23.4	17.2	1.76	22.3	17.0	1.95	21.05	17.28	2.16	19.65	17.17	2.42	
900	80	62	26.4	23.2	1.46	25.4	23.3	1.63	24.4	22.7	1.80	23.4	22.2	1.99	22.17	21.42	2.23	20.99	20.90	2.47	
	80	67	28.6	18.3	1.46	27.4	18.5	1.63	26.1	18.0	1.81	24.7	18.0	2.01	23.18	17.79	2.23	21.77	18.30	2.47	
	80	72	31.3	13.9	1.47	30.0	14.2	1.64	28.5	13.8	1.84	26.9	13.7	2.04	25.34	13.70	2.26	23.71	13.87	2.49	
	75	62	26.1	18.5	1.46	25.0	18.6	1.62	23.9	18.6	1.80	22.7	18.5	1.99	21.31	18.34	2.21	19.92	18.33	2.46	

MSA4BE030KA C7B(A,H)M03036(C,U)-A+TXV Kit

CFM	O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	
875	80	62	31.2	24.6	1.69	30.0	24.4	1.88	28.8	24.5	2.07	27.5	24.1	2.30	26.09	25.15	2.56	24.56	23.67	2.85	
	80	67	33.8	20.2	1.71	32.4	20.1	1.90	31.1	20.3	2.10	29.6	19.9	2.32	28.04	19.63	2.58	26.32	18.48	2.88	
	80	72	36.8	15.4	1.73	35.3	15.4	1.92	33.7	15.7	2.12	32.1	15.4	2.35	30.34	15.14	2.62	28.44	15.49	2.92	
	75	62	31.1	20.6	1.70	29.8	20.4	1.87	28.6	20.5	2.07	27.2	20.1	2.30	25.80	18.54	2.55	24.23	19.89	2.85	
1000	80	62	31.9	26.3	1.75	30.7	26.8	1.93	29.4	26.1	2.13	28.0	25.8	2.35	26.63	25.50	2.61	25.15	24.94	2.91	
	80	67	34.4	21.5	1.76	33.0	22.1	1.94	31.6	21.6	2.15	30.0	21.3	2.37	28.42	21.33	2.63	26.59	21.28	2.94	
	80	72	37.3	16.3	1.79	35.8	17.0	1.97	34.2	16.5	2.18	32.5	16.4	2.40	30.62	16.47	2.67	28.64	16.55	2.97	
	75	62	31.6	21.8	1.74	30.3	22.3	1.92	29.1	21.8	2.12	27.7	21.5	2.35	26.17	21.45	2.60	24.56	21.34	2.90	
1125	80	62	32.5	28.2	1.80	31.2	28.2	1.98	29.9	27.5	2.18	28.6	27.1	2.40	27.22	26.30	2.66	25.73	25.62	2.97	
	80	67	34.9	23.1	1.81	33.4	23.3	2.00	31.9	22.7	2.20	30.3	22.7	2.42	28.67	22.54	2.68	26.82	22.58	2.99	
	80	72	37.7	17.4	1.84	36.1	17.8	2.02	34.4	17.3	2.23	32.7	17.3	2.46	30.79	17.23	2.73	28.84	17.43	3.03	
	75	62	32.1	23.4	1.79	30.7	23.5	1.97	29.4	23.0	2.17	28.0	22.9	2.40	26.47	22.63	2.65	24.84	22.60	2.95	

MSA4BE036KA C7B(A,H)M03642(C,U)-B+TXV Kit

CFM	O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	
1050	80	62	36.2	28.7	2.03	34.9	28.5	2.25	33.4	28.6	2.48	31.9	28.1	2.75	30.10	29.26	3.05	28.39	27.60	3.39	
	80	67	39.8	23.6	2.04	38.2	23.5	2.26	36.5	23.7	2.50	34.7	23.3	2.77	32.88	22.98	3.06	30.92	21.39	3.39	
	80	72	43.7	18.2	2.05	41.9	18.1	2.28	40.0	18.5	2.53	38.1	18.1	2.78	36.09	17.85	3.07	33.94	18.31	3.40	
	75	62	36.1	24.0	2.03	34.7	23.8	2.25	33.2	23.9	2.49	31.7	23.5	2.75	29.85	21.61	3.05	28.08	23.18	3.39	
1200	80	62	37.1	30.7	2.09	35.6	31.3	2.31	34.1	30.6	2.54	32.5	30.1	2.81	30.80	29.72	3.11	29.24	28.99	3.44	
	80	67	40.6	25.2	2.10	38.9	25.9	2.32	37.2	25.3	2.56	35.3	25.0	2.83	33.37	25.08	3.12	31.33	24.99	3.45	
	80	72	44.5	19.2	2.11	42.7	20.0	2.34	40.7	19.4	2.59	38.7	19.3	2.84	36.59	19.44	3.13	34.39	19.59	3.46	
	75	62	36.9	25.5	2.09	35.4	26.1	2.31	33.8	25.4	2.55	32.1	25.1	2.81	30.34	24.99	3.11	28.48	24.90	3.44	
1350	80	62	37.8	32.9	2.15	36.3	33.0	2.37	34.8	32.1	2.60	33.2	31.5	2.87	31.67	30.60	3.16	30.04	29.92	3.50	
	80	67	41.2	27.1	2.15	39.5	27.4	2.37	37.6	26.8	2.62	35.7	26.7	2.89	33.76	26.44	3.17	31.67	26.56	3.50	
	80	72	45.2	20.6	2.17	43.2	21.0	2.40	41.2	20.4	2.64	39.1	20.4	2.90	36.95	20.38	3.19	34.67	20.65	3.51	
	75	62	37.5	27.3	2.15	35.9	27.5	2.37	34.3	26.8	2.60	32.5	26.6	2.87	30.72	26.40	3.16	28.81	26.39	3.50	

14 SEER + LOOSE COIL COOLING EXPANDED RATINGS (CONTINUED)

MSA4BE042KA C7B(A,H)M03642(C,U)-B+TXV Kit

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1225	80	62	43.0	33.1	2.53	41.5	32.9	2.77	39.6	33.0	3.05	37.8	32.4	3.36	35.86	34.03	3.71	33.77	32.04	4.10
	80	67	47.1	27.4	2.54	45.2	27.2	2.79	43.3	27.5	3.07	41.3	27.0	3.38	39.10	26.61	3.73	36.83	24.74	4.13
	80	72	51.6	21.2	2.58	49.6	21.1	2.82	47.5	21.5	3.10	45.2	21.1	3.41	42.81	20.81	3.77	40.30	21.37	4.16
	75	62	42.9	27.8	2.53	41.3	27.6	2.76	39.5	27.7	3.05	37.6	27.2	3.36	35.65	25.20	3.71	33.59	27.00	4.10
1400	80	62	44.0	35.4	2.60	42.4	36.1	2.83	40.5	35.2	3.12	38.5	34.8	3.43	36.55	34.53	3.78	34.45	34.11	4.18
	80	67	48.1	29.1	2.61	46.2	30.0	2.86	44.1	29.2	3.15	42.0	28.9	3.45	39.72	28.95	3.80	37.36	28.97	4.20
	80	72	52.6	22.3	2.64	50.5	23.3	2.89	48.2	22.6	3.17	45.9	22.4	3.48	43.38	22.63	3.84	40.74	22.80	4.23
	75	62	43.9	29.5	2.60	42.2	30.2	2.83	40.2	29.4	3.12	38.3	29.1	3.43	36.24	29.03	3.78	34.05	28.80	4.17
1575	80	62	44.9	37.9	2.67	43.1	38.1	2.91	41.2	37.2	3.19	39.2	36.7	3.50	37.27	36.01	3.85	35.39	35.24	4.25
	80	67	48.8	31.2	2.69	46.8	31.6	2.93	44.7	30.8	3.21	42.5	30.7	3.52	40.20	30.55	3.87	37.76	30.72	4.27
	80	72	53.3	23.8	2.71	51.1	24.4	2.95	48.8	23.7	3.24	46.3	23.7	3.55	43.76	23.63	3.91	41.12	23.95	4.30
	75	62	44.6	31.6	2.66	42.8	31.9	2.90	40.8	31.1	3.18	38.8	30.9	3.50	36.72	30.46	3.85	34.47	30.48	4.24

MSA4BE048KA C7B(A,H)M048(C,U)-C+TXV Kit

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1400	80	62	48.1	37.3	2.77	46.2	37.0	3.07	44.2	37.2	3.39	42.1	36.5	3.75	39.87	38.15	4.16	37.61	35.99	4.60
	80	67	52.3	30.8	2.81	50.3	30.6	3.10	48.1	30.9	3.41	45.8	30.3	3.78	43.45	29.85	4.18	40.99	27.77	4.64
	80	72	57.5	23.9	2.84	55.1	23.8	3.12	52.7	24.3	3.44	50.1	23.8	3.81	47.38	23.48	4.21	44.45	24.10	4.66
	75	62	47.9	31.3	2.77	45.9	31.0	3.06	44.0	31.2	3.38	41.9	30.5	3.75	39.63	28.24	4.16	37.33	30.24	4.60
1600	80	62	49.1	39.9	2.86	47.1	40.6	3.15	45.0	39.6	3.47	42.9	39.1	3.83	40.67	38.73	4.24	38.45	38.13	4.69
	80	67	53.4	32.7	2.89	51.2	33.6	3.17	49.0	32.8	3.49	46.6	32.4	3.86	44.16	32.43	4.26	41.59	32.44	4.72
	80	72	58.4	25.2	2.92	55.9	26.3	3.20	53.1	25.5	3.53	50.5	25.3	3.88	47.84	25.41	4.29	45.09	25.56	4.74
	75	62	48.8	33.2	2.85	46.9	33.9	3.14	44.8	33.0	3.46	42.6	32.6	3.83	40.28	32.51	4.24	37.87	32.38	4.68
1800	80	62	49.9	42.7	2.94	47.9	42.8	3.23	45.8	41.7	3.55	43.7	41.1	3.91	41.56	40.15	4.32	39.48	39.31	4.77
	80	67	54.2	35.0	2.97	52.0	35.4	3.25	49.7	34.6	3.57	47.2	34.4	3.94	44.67	34.18	4.34	42.00	34.34	4.80
	80	72	58.8	26.9	3.00	56.4	27.4	3.28	53.8	26.6	3.59	51.2	26.6	3.96	48.40	26.45	4.37	45.55	26.76	4.82
	75	62	49.6	35.5	2.94	47.6	35.7	3.23	45.4	34.8	3.54	43.1	34.6	3.91	40.76	34.07	4.32	38.30	34.07	4.76

MSA4BE060K with C6BH-X60C-(C,D) + TDR

O.D.T			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1600	80	62	59.6	49.6	3.92	57.1	48.7	4.32	54.2	47.8	4.77	51.0	47.3	5.27	47.6	45.5	5.84
	80	67	64.6	42.2	3.95	61.8	41.0	4.36	58.6	39.5	4.81	55.1	38.1	5.31	51.3	36.5	5.89
	80	72	70.9	33.8	3.99	67.7	32.7	4.41	64.0	31.5	4.86	60.1	30.1	5.37	55.6	28.7	5.94
	75	63	60.2	40.8	3.93	57.6	39.6	4.33	54.7	38.3	4.78	51.4	36.9	5.28	47.9	35.3	5.85
1700	80	62	60.3	51.3	3.97	57.7	50.2	4.36	54.7	49.9	4.81	51.6	48.8	5.31	48.1	47.3	5.89
	80	67	65.3	43.1	4.01	62.4	42.0	4.40	59.1	40.6	4.85	55.6	39.2	5.35	51.7	37.6	5.93
	80	72	71.3	34.5	4.06	68.1	33.5	4.46	64.4	32.2	4.90	60.3	30.9	5.41	55.6	29.4	5.98
	75	63	60.9	41.9	3.98	58.2	40.7	4.37	55.2	39.4	4.82	51.9	37.9	5.32	48.2	36.3	5.90
1800	80	62	60.8	53.8	4.03	58.3	52.3	4.41	55.3	51.3	4.85	52.0	50.6	5.35	48.5	48.5	5.93
	80	67	65.9	44.2	4.07	62.9	43.1	4.45	59.6	41.7	4.89	55.9	40.3	5.39	52.0	38.6	5.97
	80	72	71.7	35.3	4.12	68.5	34.2	4.50	64.6	33.0	4.94	60.3	31.6	5.44	55.9	30.0	6.02
	75	63	61.5	42.9	4.04	58.7	41.8	4.42	55.6	40.4	4.86	52.2	38.9	5.36	48.5	37.3	5.94

14 SEER AHU COOLING EXPANDED RATINGS

MSA4BE018KA B6BM-X24K-A

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
525	80	62	19.4	15.6	1.05	18.5	15.5	1.19	17.7	15.6	1.33	16.7	15.3	1.48	15.78	15.51	1.65	14.82	14.57	1.85
	80	67	21.2	12.7	1.05	20.2	12.6	1.19	19.3	12.7	1.33	18.2	12.5	1.49	17.04	12.24	1.67	15.89	11.54	1.86
	80	72	23.2	9.7	1.05	22.2	9.6	1.19	21.1	9.8	1.34	19.8	9.5	1.51	18.61	9.37	1.68	17.36	9.57	1.87
	75	62	19.3	12.9	1.05	18.5	12.8	1.19	17.6	12.9	1.33	16.6	12.6	1.48	15.63	11.44	1.65	14.47	12.38	1.85
600	80	62	19.9	17.0	1.08	19.0	17.3	1.21	18.1	16.9	1.35	17.3	16.3	1.51	16.36	15.80	1.68	15.38	15.25	1.88
	80	67	21.6	13.7	1.07	20.7	14.1	1.22	19.6	13.7	1.36	18.5	13.5	1.52	17.31	13.50	1.70	16.12	13.46	1.89
	80	72	23.7	10.3	1.07	22.6	10.7	1.22	21.4	10.4	1.37	20.1	10.2	1.54	18.90	10.28	1.71	17.60	10.31	1.90
	75	62	19.8	13.9	1.08	18.9	14.2	1.21	17.9	13.8	1.35	16.9	13.7	1.51	15.89	13.58	1.68	14.71	13.46	1.88
675	80	62	20.5	18.6	1.10	19.7	18.3	1.24	18.8	17.5	1.38	17.9	16.9	1.54	16.83	16.26	1.72	15.84	15.77	1.91
	80	67	22.1	14.9	1.10	21.0	15.0	1.24	19.9	14.7	1.39	18.8	14.6	1.55	17.51	14.43	1.73	16.30	14.45	1.91
	80	72	24.1	11.1	1.10	22.9	11.3	1.25	21.7	11.0	1.40	20.4	10.9	1.57	19.09	10.86	1.74	17.76	10.95	1.93
	75	62	20.3	15.2	1.10	19.3	15.3	1.24	18.3	14.9	1.38	17.3	14.8	1.53	16.18	14.62	1.71	14.98	14.55	1.91

MSA4BE024KA B6BM-X24K-A

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
700	80	62	25.5	20.7	1.36	24.5	20.5	1.53	23.4	20.6	1.70	22.3	20.2	1.90	21.07	20.72	2.12	19.94	19.60	2.38
	80	67	27.8	16.8	1.36	26.6	16.6	1.54	25.4	16.8	1.72	24.1	16.5	1.91	22.66	16.32	2.15	21.30	15.46	2.39
	80	72	30.4	12.8	1.37	29.1	12.7	1.55	27.8	13.0	1.74	26.3	12.7	1.95	24.83	12.49	2.17	23.35	12.82	2.42
	75	62	25.4	17.0	1.36	24.4	17.0	1.53	23.2	17.1	1.70	22.1	16.7	1.90	20.84	15.37	2.12	19.48	16.53	2.38
800	80	62	26.2	22.4	1.39	25.1	22.8	1.56	24.0	22.3	1.74	23.0	21.7	1.93	21.85	21.11	2.16	20.66	20.49	2.42
	80	67	28.3	18.0	1.40	27.1	18.6	1.57	25.8	18.1	1.75	24.5	18.0	1.95	23.06	17.91	2.18	21.64	17.90	2.43
	80	72	31.0	13.6	1.41	29.7	14.2	1.59	28.2	13.7	1.77	26.7	13.6	1.99	25.19	13.70	2.21	23.63	13.80	2.45
	75	62	25.9	18.4	1.39	24.8	18.8	1.56	23.7	18.3	1.73	22.5	18.1	1.93	21.23	18.02	2.15	19.83	17.91	2.41
900	80	62	26.8	24.3	1.42	25.8	24.1	1.59	24.8	23.1	1.77	23.7	22.5	1.97	22.46	21.70	2.21	21.26	21.17	2.45
	80	67	28.8	19.6	1.43	27.5	19.8	1.60	26.2	19.3	1.78	24.8	19.3	1.98	23.35	19.09	2.21	21.91	19.16	2.46
	80	72	31.5	14.7	1.44	30.1	15.0	1.61	28.6	14.5	1.81	27.0	14.5	2.02	25.41	14.47	2.24	23.81	14.67	2.48
	75	62	26.4	19.9	1.42	25.3	20.0	1.59	24.1	19.5	1.76	22.8	19.4	1.96	21.53	19.20	2.18	20.10	19.16	2.44

MSA4BE030KA B6BM-X30K-A

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
875	80	62	32.3	25.9	1.74	31.0	25.7	1.94	29.5	25.8	2.15	28.0	25.3	2.39	26.48	26.03	2.67	24.94	24.52	2.99
	80	67	34.9	20.9	1.76	33.3	20.8	1.96	31.8	21.0	2.17	30.1	20.6	2.41	28.40	20.29	2.68	26.53	19.28	3.01
	80	72	37.6	15.9	1.78	36.0	15.8	1.98	34.3	16.1	2.19	32.5	15.7	2.44	30.63	15.46	2.71	28.60	15.79	3.03
	75	62	32.2	21.5	1.74	30.8	21.2	1.93	29.4	21.4	2.15	27.9	20.9	2.39	26.24	19.18	2.67	24.49	20.67	2.99
1000	80	62	33.0	28.0	1.79	31.5	28.4	1.99	30.1	27.8	2.20	28.7	27.1	2.44	27.29	26.37	2.72	25.73	25.51	3.04
	80	67	35.5	22.5	1.81	33.9	23.1	2.01	32.2	22.5	2.22	30.5	22.3	2.46	28.75	22.27	2.74	26.82	22.22	3.06
	80	72	38.2	16.8	1.83	36.5	17.5	2.03	34.7	17.0	2.25	32.9	16.8	2.49	30.95	16.88	2.77	28.87	16.94	3.09
	75	62	32.8	23.0	1.79	31.3	23.5	1.99	29.9	22.9	2.20	28.3	22.6	2.44	26.61	22.50	2.71	24.81	22.36	3.04
1125	80	62	33.6	30.2	1.84	32.2	30.0	2.04	30.9	28.8	2.25	29.5	28.0	2.50	27.98	27.04	2.77	26.35	26.24	3.10
	80	67	35.9	24.3	1.86	34.2	24.6	2.06	32.6	24.0	2.27	30.8	23.9	2.51	29.00	23.72	2.79	27.04	23.77	3.11
	80	72	38.6	18.1	1.88	36.8	18.4	2.08	35.0	17.8	2.30	33.1	17.8	2.54	31.17	17.77	2.82	29.05	17.95	3.14
	75	62	33.2	24.8	1.84	31.7	24.9	2.04	30.2	24.3	2.25	28.6	24.2	2.49	26.89	23.93	2.76	25.07	23.87	3.09

MSA4BE036KA B6BM-X36K-B

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1050	80	62	37.0	30.5	2.06	35.5	30.3	2.29	34.0	30.4	2.54	32.3	29.9	2.81	30.63	30.12	3.14	29.07	28.58	3.49
	80	67	40.3	24.8	2.07	38.6	24.6	2.30	36.8	24.8	2.55	34.9	24.4	2.83	32.98	24.05	3.14	30.96	22.88	3.50
	80	72	43.9	18.8	2.08	42.0	18.7	2.32	40.0	19.0	2.58	38.0	18.6	2.86	35.92	18.37	3.15	33.74	18.83	3.50
	75	62	36.9	25.2	2.06	35.3	25.0	2.29	33.7	25.1	2.54	32.0	24.6	2.81	30.16	22.72	3.14	28.29	24.42	3.49
1200	80	62	37.9	33.0	2.11	36.4	33.5	2.34	34.9	32.5	2.59	33.3	31.5	2.88	31.75	30.67	3.18	30.08	29.82	3.54
	80	67	41.0	26.6	2.12	39.3	27.4	2.35	37.4	26.7	2.60	35.4	26.4	2.88	33.47	26.48	3.19	31.39	26.48	3.55
	80	72	44.7	19.9	2.13	42.7	20.8	2.37	40.7	20.2	2.63	38.6	20.0	2.90	36.44	20.14	3.21	34.19	20.28	3.55
	75	62	37.6	27.1	2.11	36.0	27.6	2.34	34.3	27.0	2.58	32.5	26.6	2.87	30.66	26.57	3.18	28.74	26.47	3.54
1350	80	62	38.8	35.3	2.16	37.4	34.9	2.39	35.9	33.5	2.64	34.3	32.6	2.93	32.65	31.54	3.23	30.90	30.77	3.59
	80	67	41.6	28.9	2.17	39.8	29.2	2.40	37.8	28.5	2.66	35.9	28.4	2.93	33.84	28.25	3.24	31.73	28.37	3.59
	80	72	45.3	21.5	2.18	43.2	21.9	2.43	41.1	21.3	2.68	38.9	21.3	2.96	36.74	21.26	3.26	34.44	21.55	3.60
	75	62	38.2	29.2	2.16	36.5	29.5	2.39	34.8	28.8	2.64	32.9	28.6	2.92	31.05	28.30	3.23	29.11	28.28	3.59

14 SEER AHU COOLING EXPANDED RATINGS (CONTINUED)

MSA4BE042KA B6BM-X42K-B

CFM	O.D.T		65°F			75°F			85°F			95°F			105°F			115°F		
	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1225	80	62	42.9	35.3	2.48	41.3	35.0	2.71	39.3	35.1	2.99	37.4	34.5	3.29	35.50	34.90	3.64	33.65	33.08	4.03
	80	67	46.7	28.7	2.50	44.7	28.5	2.74	42.6	28.8	3.01	40.3	28.2	3.31	38.05	27.84	3.65	35.72	26.54	4.04
	80	72	50.9	21.7	2.52	48.7	21.6	2.76	46.5	22.0	3.03	44.0	21.6	3.34	41.61	21.25	3.68	39.02	21.76	4.07
	75	62	42.7	29.2	2.48	40.9	28.9	2.71	38.9	29.1	2.98	36.9	28.5	3.29	34.84	26.23	3.64	32.66	28.17	4.02
1400	80	62	44.0	38.2	2.55	42.2	38.8	2.78	40.4	37.7	3.06	38.6	36.5	3.37	36.76	35.52	3.71	34.80	34.50	4.10
	80	67	47.5	30.9	2.56	45.3	31.7	2.81	43.3	30.9	3.08	41.0	30.6	3.38	38.67	30.58	3.72	36.20	30.53	4.11
	80	72	51.8	23.1	2.59	49.6	24.1	2.82	47.2	23.4	3.10	44.7	23.2	3.41	42.14	23.29	3.75	39.43	23.42	4.13
	75	62	43.5	31.3	2.54	41.7	32.0	2.78	39.6	31.2	3.06	37.6	30.8	3.36	35.41	30.65	3.70	33.17	30.51	4.09
1575	80	62	45.1	41.0	2.62	43.4	40.5	2.85	41.6	38.8	3.14	39.8	37.8	3.44	37.80	36.52	3.78	35.72	35.57	4.17
	80	67	48.2	33.5	2.63	46.0	33.8	2.88	43.8	33.0	3.14	41.5	32.8	3.45	39.11	32.59	3.79	36.62	32.69	4.18
	80	72	52.5	24.9	2.66	50.2	25.4	2.89	47.7	24.7	3.17	45.1	24.7	3.48	42.50	24.59	3.82	39.73	24.89	4.20
	75	62	44.2	33.8	2.61	42.3	34.1	2.85	40.2	33.2	3.12	38.1	33.0	3.43	35.86	32.63	3.77	33.65	32.60	4.16

MSA4BE048KA B6BM-X48K-C

CFM	O.D.T		65°F			75°F			85°F			95°F			105°F			115°F		
	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1400	80	62	47.6	38.2	2.72	45.7	37.9	3.01	43.8	38.1	3.31	41.8	37.4	3.67	39.76	39.03	4.06	37.62	36.93	4.49
	80	67	51.6	31.0	2.76	49.6	30.8	3.03	47.4	31.1	3.34	45.2	30.5	3.69	42.81	30.06	4.08	40.38	28.39	4.52
	80	72	57.0	23.9	2.79	54.8	23.8	3.06	52.3	24.3	3.37	49.8	23.8	3.72	47.11	23.53	4.11	44.31	24.17	4.55
	75	62	47.1	31.4	2.72	45.2	31.1	3.00	43.2	31.3	3.31	41.2	31.0	3.66	39.07	28.73	4.06	36.82	30.75	4.49
1600	80	62	48.8	41.2	2.80	46.9	41.8	3.08	45.0	40.9	3.39	42.9	40.4	3.74	41.09	39.70	4.14	39.06	38.73	4.58
	80	67	52.8	33.1	2.83	50.7	34.0	3.10	48.5	33.2	3.41	46.0	32.8	3.76	43.61	33.20	4.15	41.09	33.21	4.59
	80	72	58.2	25.3	2.86	55.7	26.5	3.13	53.1	25.7	3.44	50.4	25.5	3.79	47.43	25.68	4.18	44.63	25.81	4.61
	75	62	48.1	33.9	2.79	46.2	34.6	3.07	44.2	33.8	3.38	42.0	33.4	3.73	39.78	33.25	4.13	37.50	33.14	4.56
1800	80	62	49.9	44.4	2.87	48.0	44.5	3.15	46.3	43.1	3.46	44.4	42.1	3.82	42.32	40.89	4.21	40.18	40.01	4.65
	80	67	53.7	35.7	2.90	51.5	36.1	3.17	49.2	35.6	3.48	46.7	35.5	3.83	44.23	35.24	4.22	41.64	35.41	4.66
	80	72	58.9	27.2	2.93	56.1	27.8	3.20	53.4	27.0	3.51	50.8	27.0	3.86	48.03	26.85	4.25	45.17	27.16	4.68
	75	62	49.0	36.5	2.86	47.0	36.7	3.14	44.9	35.8	3.45	42.7	35.6	3.80	40.41	35.27	4.20	38.04	35.27	4.63

MSA4BE060K with B6BM-X60K-C

CFM	O.D.T		75°F			85°F			95°F			105°F			115°F		
	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1600	80	62	59.6	49.6	3.92	57.1	48.7	4.32	54.2	47.8	4.77	51.0	47.3	5.27	47.6	45.5	5.84
	80	67	64.6	42.2	3.95	61.8	41.0	4.36	58.6	39.5	4.81	55.1	38.1	5.31	51.3	36.5	5.89
	80	72	70.9	33.8	3.99	67.7	32.7	4.41	64.0	31.5	4.86	60.1	30.1	5.37	55.6	28.7	5.94
	75	63	60.2	40.8	3.93	57.6	39.6	4.33	54.7	38.3	4.78	51.4	36.9	5.28	47.9	35.3	5.85
1700	80	62	60.3	51.3	3.97	57.7	50.2	4.36	54.7	49.9	4.81	51.6	48.8	5.31	48.1	47.3	5.89
	80	67	65.3	43.1	4.01	62.4	42.0	4.40	59.1	40.6	4.85	55.6	39.2	5.35	51.7	37.6	5.93
	80	72	71.3	34.5	4.06	68.1	33.5	4.46	64.4	32.2	4.90	60.3	30.9	5.41	55.6	29.4	5.98
	75	63	60.9	41.9	3.98	58.2	40.7	4.37	55.2	39.4	4.82	51.9	37.9	5.32	48.2	36.3	5.90
1800	80	62	60.8	53.8	4.03	58.3	52.3	4.41	55.3	51.3	4.85	52.0	50.6	5.35	48.5	48.5	5.93
	80	67	65.9	44.2	4.07	62.9	43.1	4.45	59.6	41.7	4.89	55.9	40.3	5.39	52.0	38.6	5.97
	80	72	71.7	35.3	4.12	68.5	34.2	4.50	64.6	33.0	4.94	60.3	31.6	5.44	55.9	30.0	6.02
	75	63	61.5	42.9	4.04	58.7	41.8	4.42	55.6	40.4	4.86	52.2	38.9	5.36	48.5	37.3	5.94



For current Energy Star Information please refer to www.energystar.gov



MAYTAG

Before purchasing this appliance, read important energy cost and efficiency information available from your retailer. Specifications and illustrations subject to change without notice and without incurring obligations.

Manufactured under license by NORDYNE, O'Fallon, MO. ©Registered Trademark/™ Trademark of Maytag Corporation or its related companies. ©2012. All rights reserved.
595D-0812 (Replaces 595D-0112)

Printed in U.S.A. (08/12)